



20kVA Surge Protector for Area Light and Flood Light (OLASP, OLASP1)

Installation Instructions

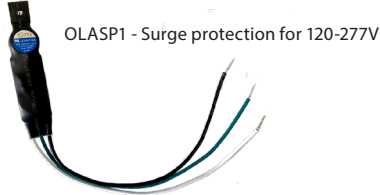

OLASP1 - Surge protection for 120-277V

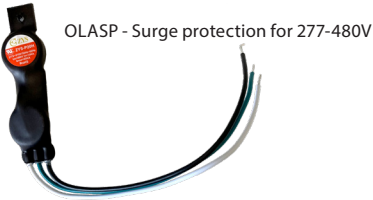

OLASP - Surge protection for 277-480V

SAFETY INSTRUCTIONS AND WARNINGS

- When using electrical equipment, basic safety precautions should always be observed
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved
- Installation should only be conducted by a qualified electrician in accordance with NEC and any relevant local building codes.
- Be certain electrical power is OFF before and during installation and maintenance.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or sharp objects.

INSTRUCTIONS

Before Installation, carefully remove all parts from the packaging. Inspect product for defects due to shipping. Always turn off the power supply from main circuit breaker first!

WIRING

1. Open area light or flood light cover.
2. Connect the three wires (live, neutral, ground) from the surge protector (OLASP1 or OLASP) to the terminal inputs.
3. Tuck the surge protector inside the fixture.
4. Close the area light or flood light cover.

Thank you for choosing

LITETRONICS®

6969 W. 73rd Street

Bedford Park, IL 60638

WWW.LITETRONICS.COM

CustomerService@Litetronics.com or 1-800-860-3392



**RoHS
Compliant**

The information and product specifications contained in these instructions are based upon data believed to be accurate at the time of printing. This information is subject to change without notice and without incurring liability. If you have questions regarding specific product details, please contact us at 800-860-3392 or via email at customerservice@litetronics.com. To check for an updated version of these instructions, please visit www.litetronics.com.